




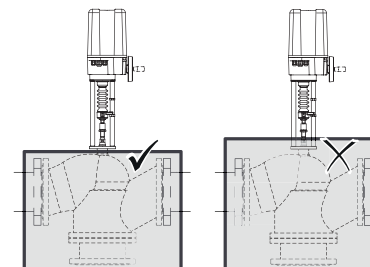

H6..W..-S7
H7..W..-S7

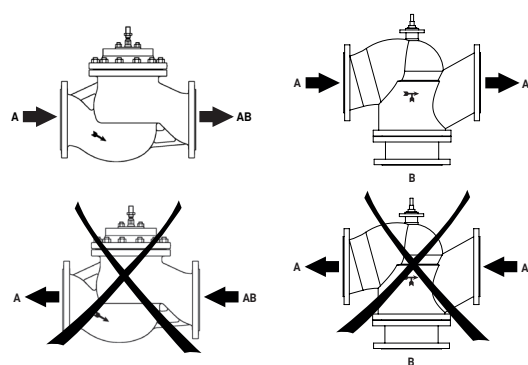

70994-00001.L





p_S < 1600 kPa (PN 16) t = +5°C ... +120°C		H6..W..-S7					H7..W..-S7												
																			
Ⓜ	DN		B	H	I	W		B	H	I	W	L	D	K	d	C	X	Y	
	[mm]		[mm]	[mm]	[mm]	[kg]		[mm]	[mm]	[mm]	[kg]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
GV12..	200	H6200W630-S7	187	315	681	156	H7200W630-S7	379	236	681	173	600	340	295	12 x 22	30	1210	200	
	250	H6250W1000-S7	233	375	621	239	H7250W1000-S7	439	282	681	283	730	405	355	12 x 26	32	1270	250	




GV12-24-SR-T
GV12-230-3-T

5 m	0,50 mm ²
10 m	0,75 mm ²
15 m	1,50 mm ²
20 m	1,50 mm ²
25 m	2,50 mm ²
30 m	2,50 mm ²
35 m	2,50 mm ²
40 m	4,00 mm ²
45 m	4,00 mm ²
50 m	4,00 mm ²
55 m	4,00 mm ²

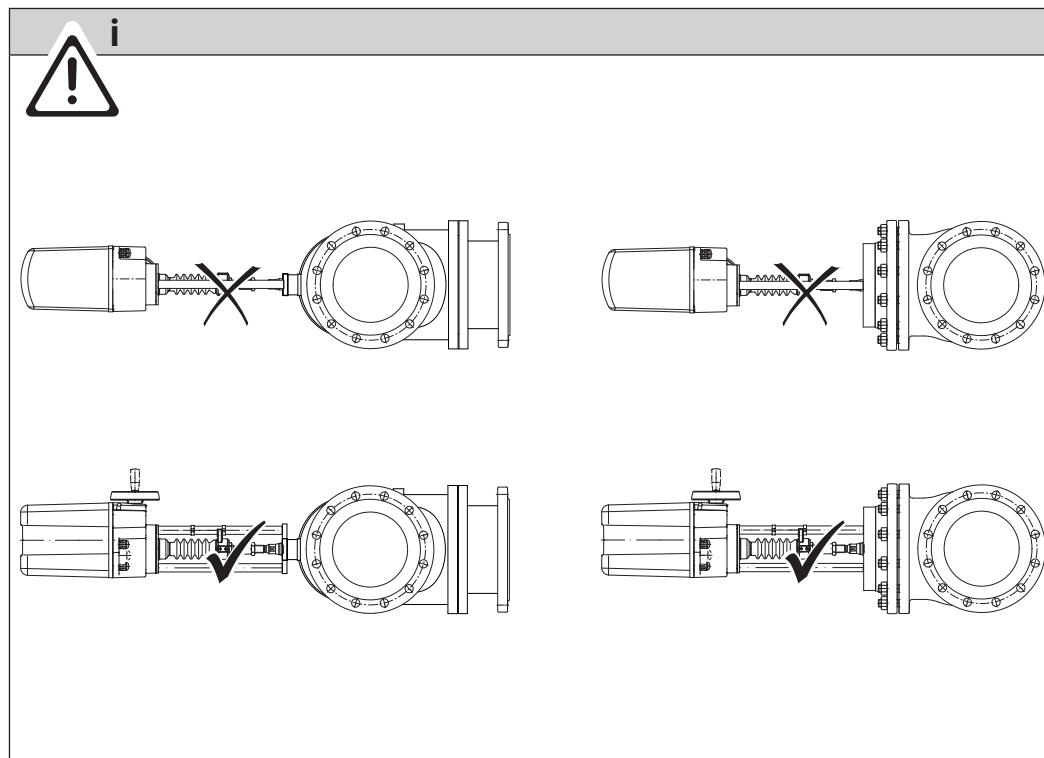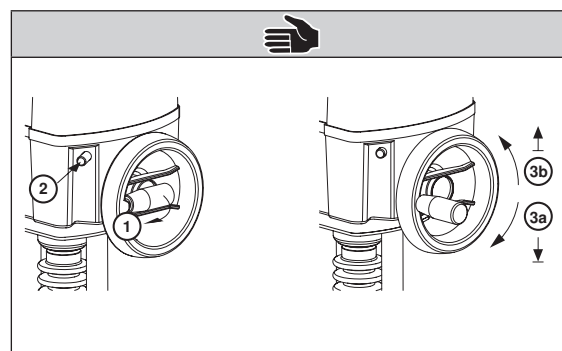


GV12-24-SR-T

AC/DC 24 V




AC/DC 24 V



			A - AB
Y = 0 / 2 V			0%
Y = 10 V			100%

GV12-230-3-T

AC 230 V

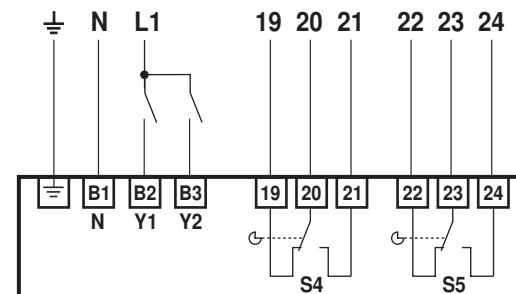

	(M)	A - AB 	A - AB
Y1		0%	100%
Y2		100%	0%