

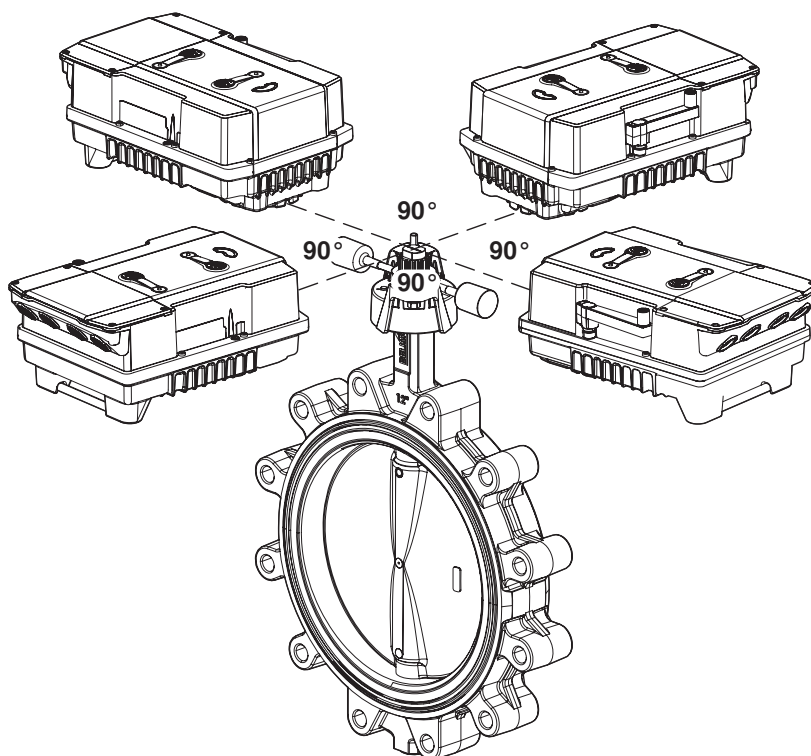


i



1


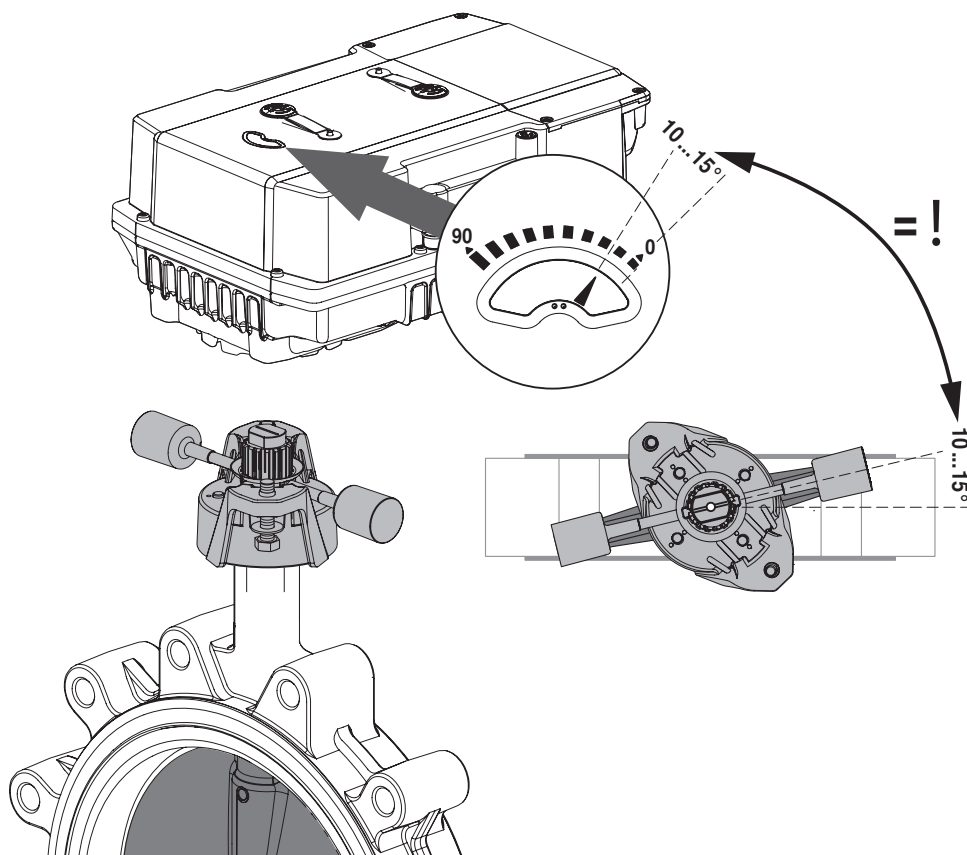


Video: IP66/67 with Belimo PR(K) actuator




[www.belimo.eu/safety](http://www.belimo.eu/safety)






2

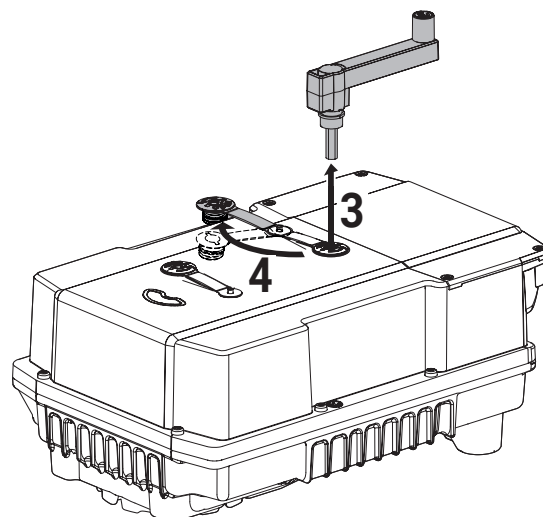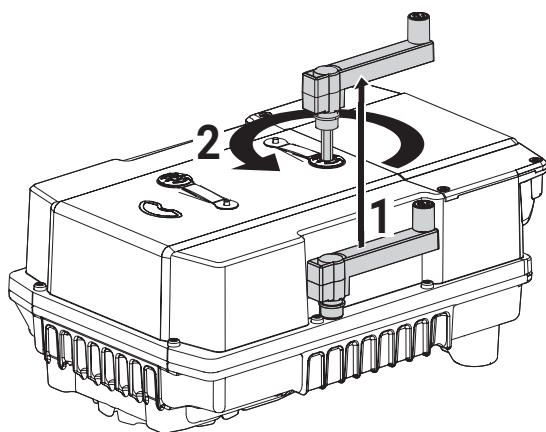


3

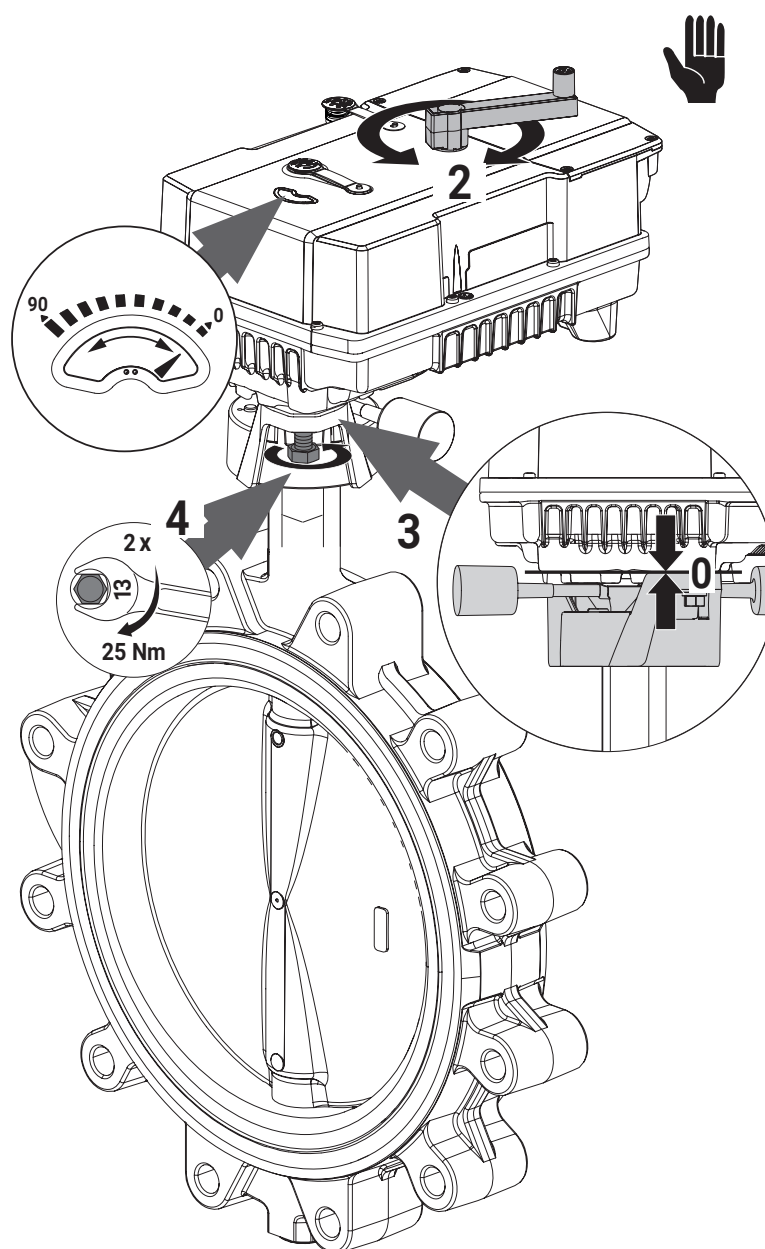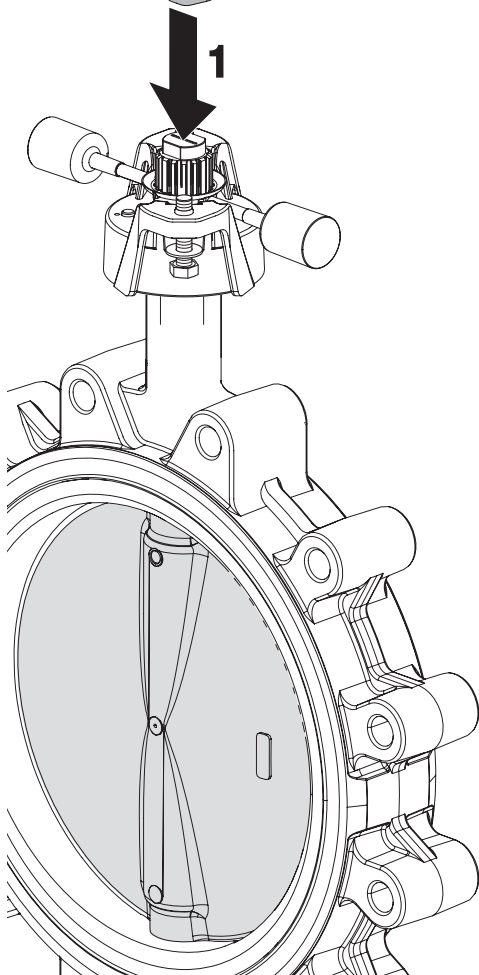
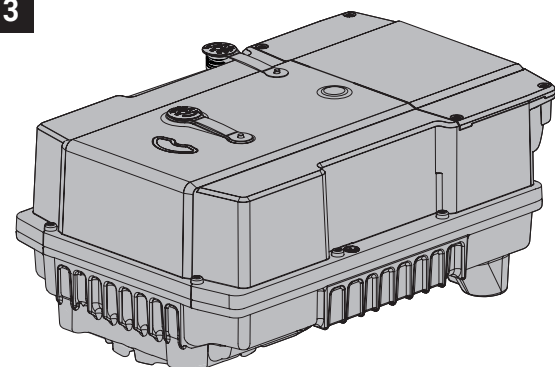


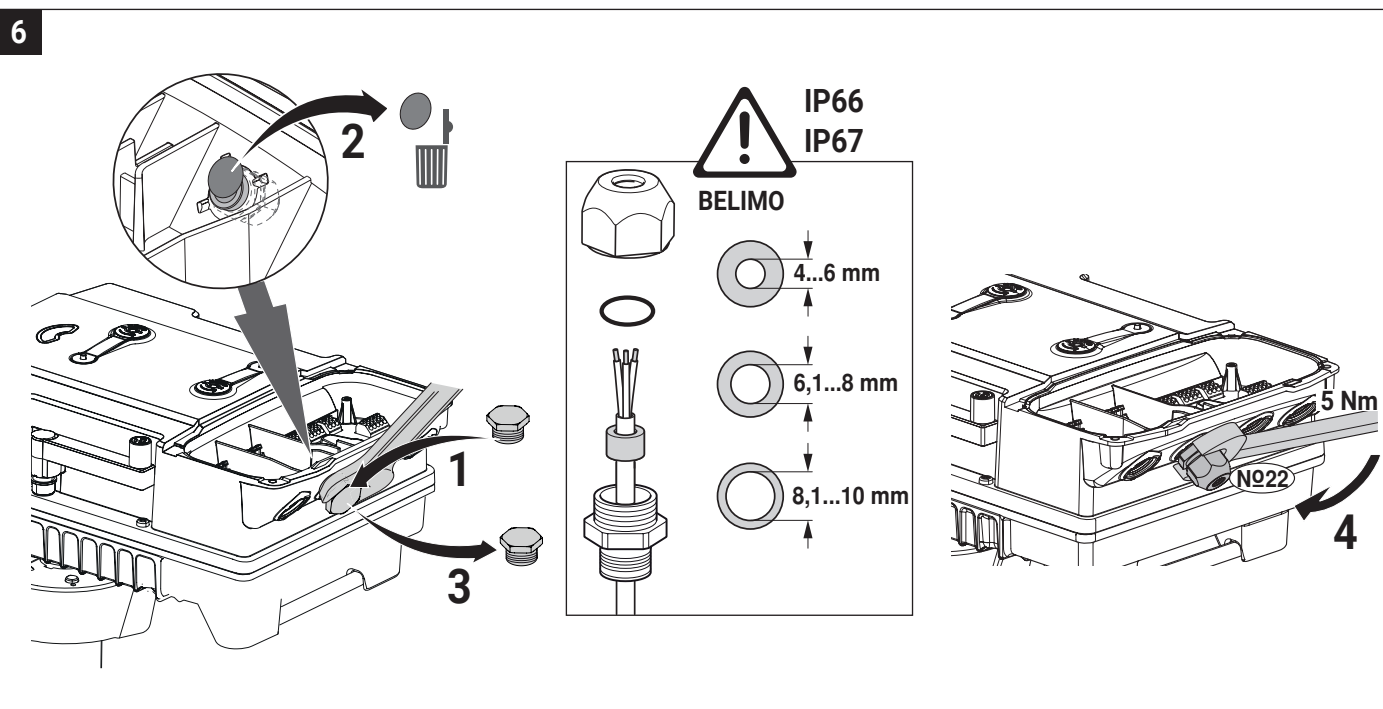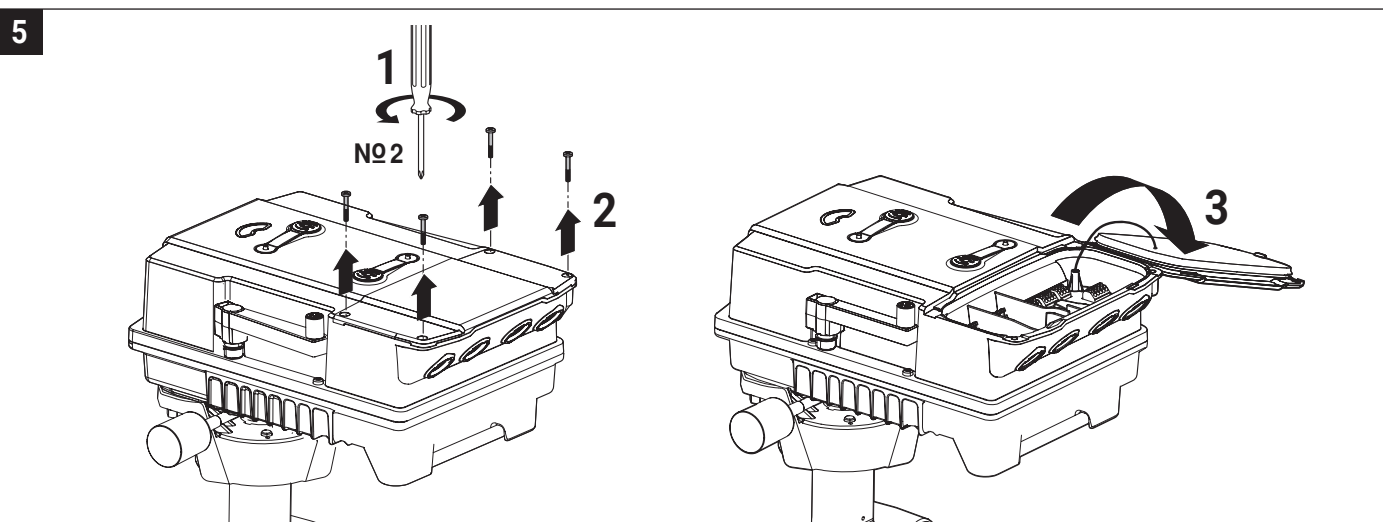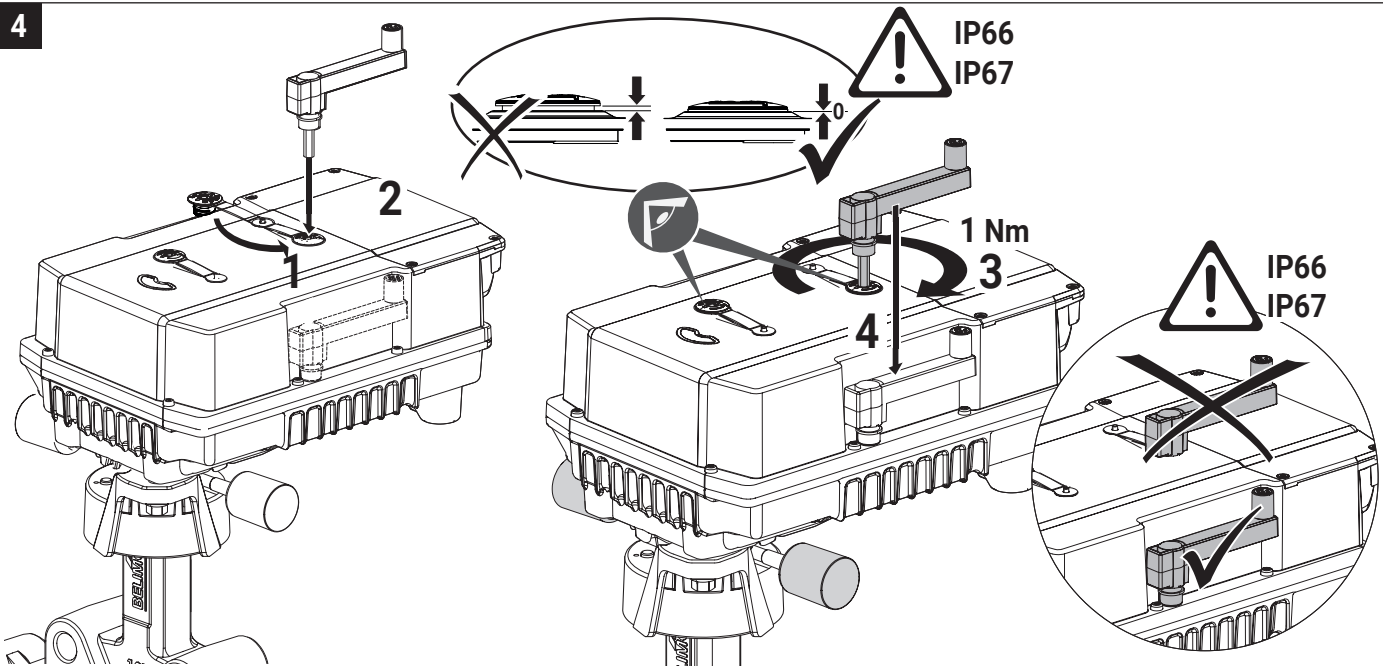


7

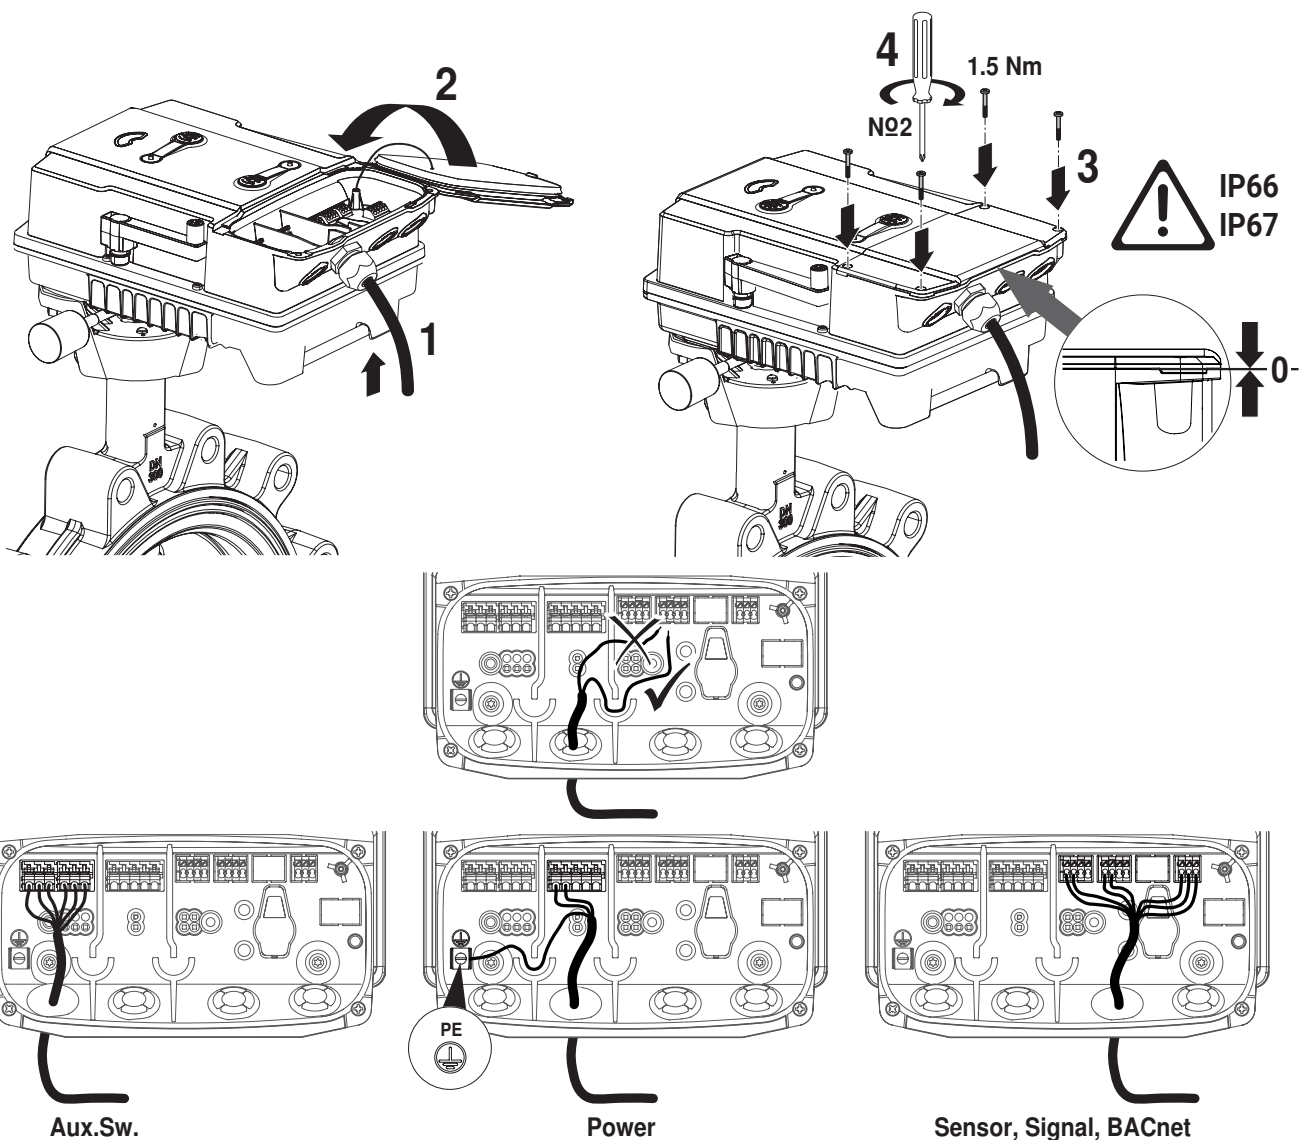


AC 24...240 V ⚠  
DC 24...125 V



PRCA-S2-T  
PR(K)CA-BAC-S2-T



AC 24...240 V ⚠  
DC 24...125 V





PRCA-S2-T  
PR(K)CA-BAC-S2-T


## Connection auxiliary switch

230 V + 230 V ✓  
24 V + 24 V

~~230 V + 24 V~~  
~~24 V + 230 V~~




AC 24...240 V  
DC 24...125 V

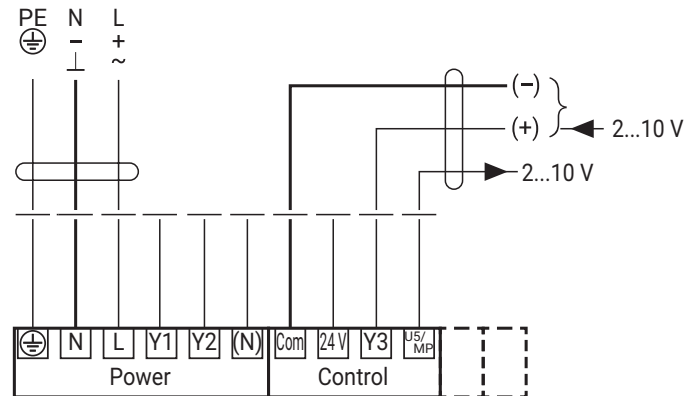


PR(K)CA-BAC-S2-T





## MP-Bus

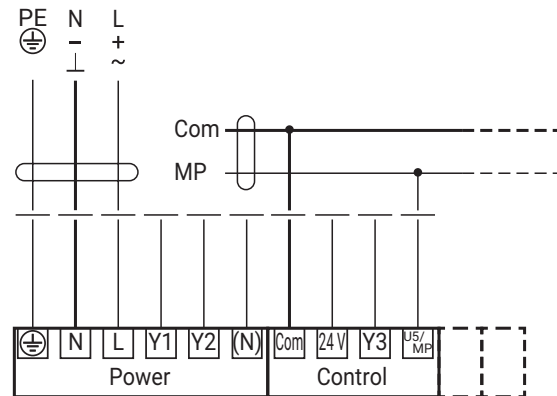


## BACnet MS/TP / Modbus RTU

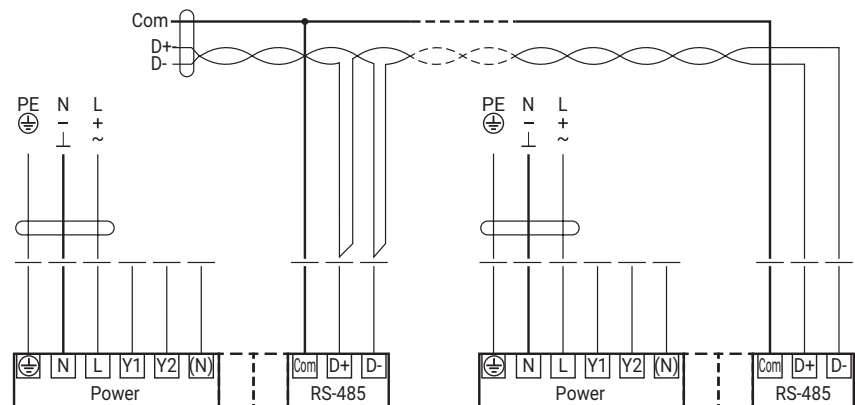


## BACnet MS/TP / Modbus RTU / analog

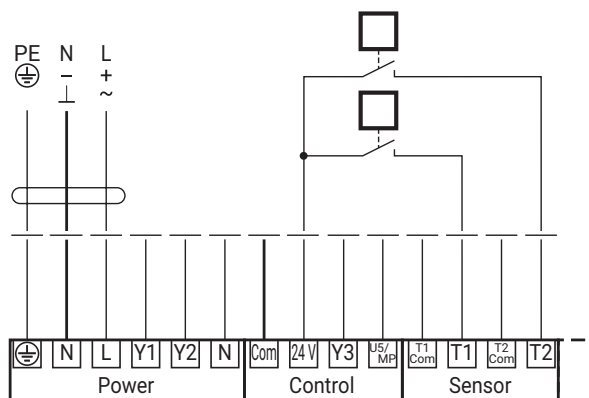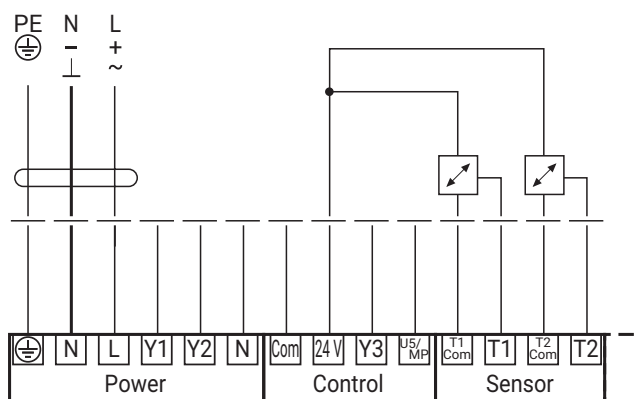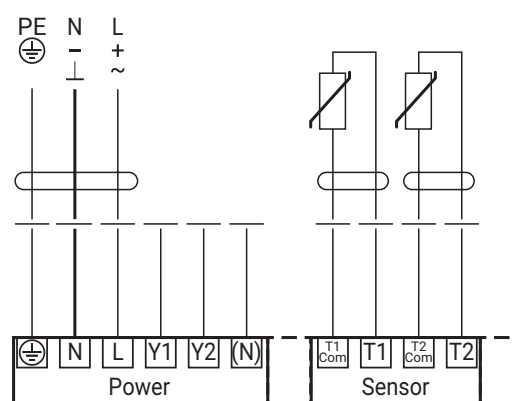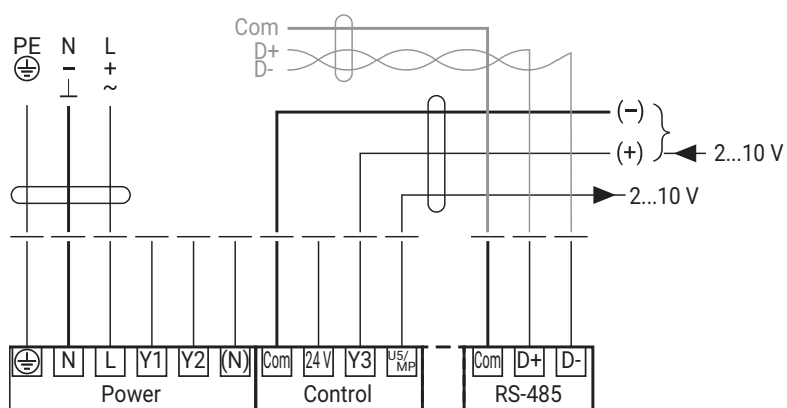

i

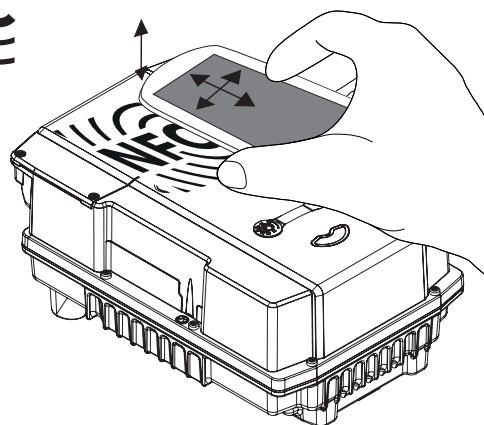Available on the  
App StoreGET IT ON  
Google Play



i


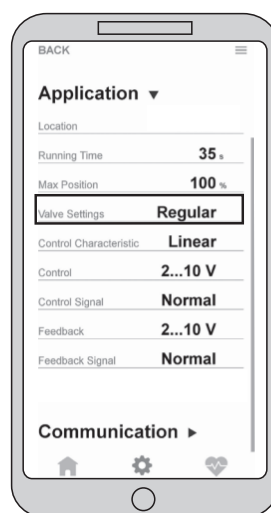


|            |                                      |
|------------|--------------------------------------|
| Regular    | DN 80...150<br>D6300W(L)<br>Retrofit |
| DN 200/8"  | D6200W(L)                            |
| DN 250/10" | D6250W(L)                            |


max. flow velocity  
4 m/s

i

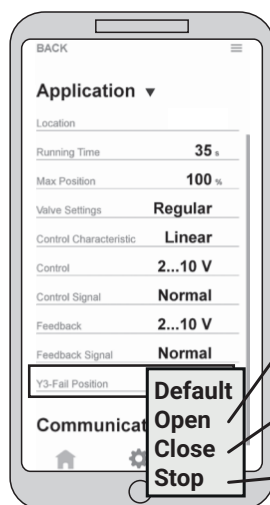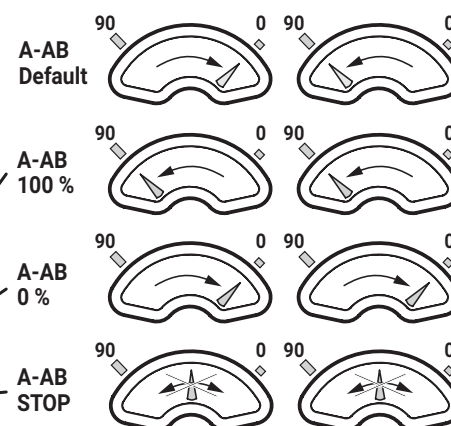
Y3-Fail  
PositionControl Signal  
NormalControl Signal  
Inverted

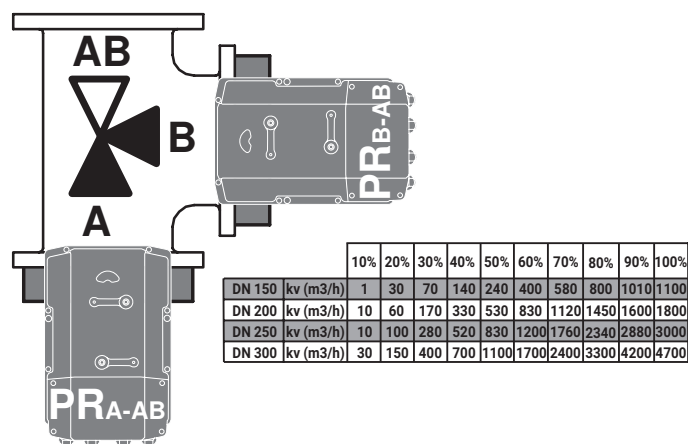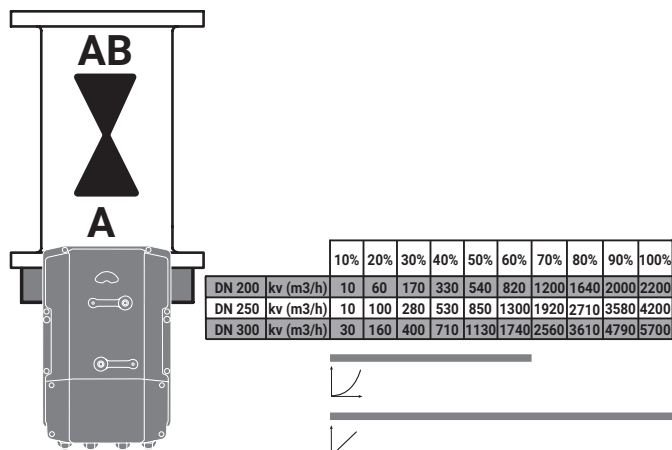


## PR(K)CA-S2-T..

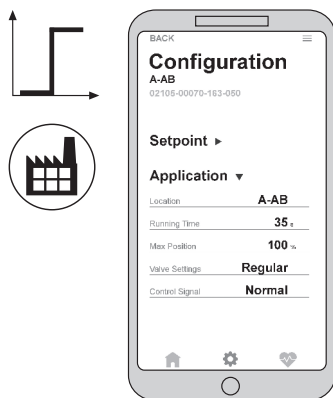

## D7..L/BAC

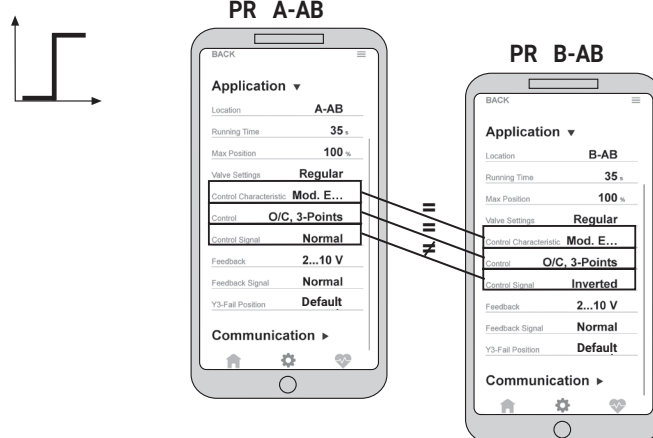

## PR(K)CA-BAC-S2-T..

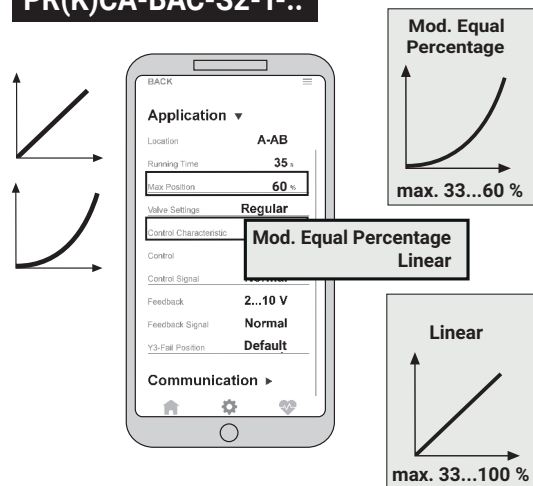

## D7..L/BAC

