


外形尺寸
OVERALL DIMENSIONS

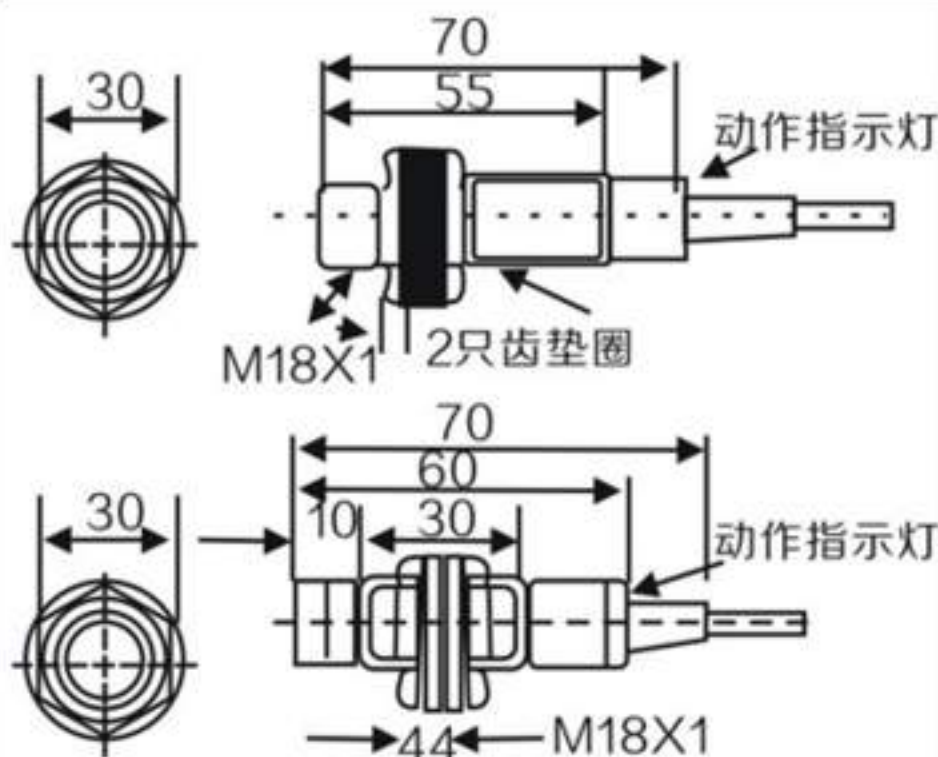

检测距离 DETECTION DISTANCE

0-5mm

埋入式 Flush	直流 DC 6-36 VDC	NPN	NO	CM18-3005NA
			NC	CM18-3005NB
			NO+NC	CM18-3005NC
		PNP	NO	CM18-3005PA
			NC	CM18-3005PB
			NO+NC	CM18-3005PC
	交流 AC 90-250 VAC	SCR 可控硅 Control- lable silicon	NO	CM18-2005A
			NC	CM18-2005B

检测距离 DETECTION DISTANCE

0-8mm

非埋入式 Flush	直流 DC 6-36 VDC	NPN	NO	CM18-3008NA
			NC	CM18-3008NB
			NO+NC	CM18-3008NC
		PNP	NO	CM18-3008PA
			NC	CM18-3008PB
			NO+NC	CM18-3008PC
	交流 AC 90-250 VAC	SCR 可控硅 Control- lable silicon	NO	CM18-2008A
			NC	CM18-2008B

可检测体 Detectable object	导体及介电体 conductor and dielectric body
消耗电流 Consumption current	直流(NPN PNP)型 DC12V时8mA, 24V时15mA、交流型: 10mA以下 DC<15mA、AC<10mA
输出电流 Control output	直流: 200mA, 交流型: 300mA
输出电压降 Output voltage drop DC/AC	直流 (NPN PNP) 3V以下, 交流型: 7V以下 DC<3V、AC<7V
响应频率 DC/AC Response frequency	直流: 50Hz, 交流型: 10Hz
外壳材料 Shell material	ABS树脂/金属 Resin, Metal
工作环境温度 Working environment temperature	-25°C~70°C
绝缘电阻 Insulation resistance	50MΩ
防护结构 Protection structure	IEC标准 IP54 IEC standard Ip54
可替代国内型号 Alternative model at home and abroad	LJC18A3-□□