

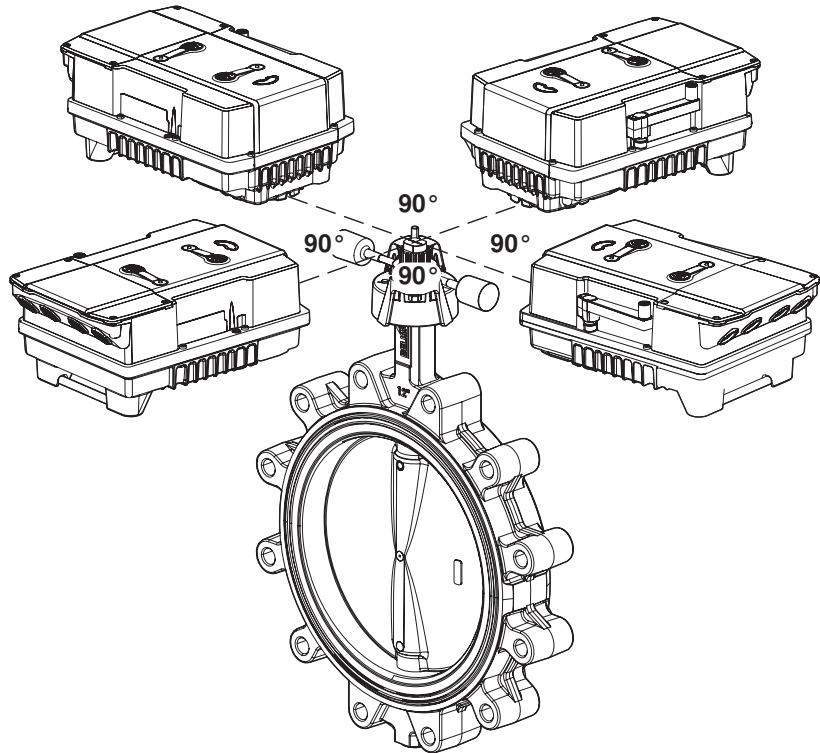


i



1

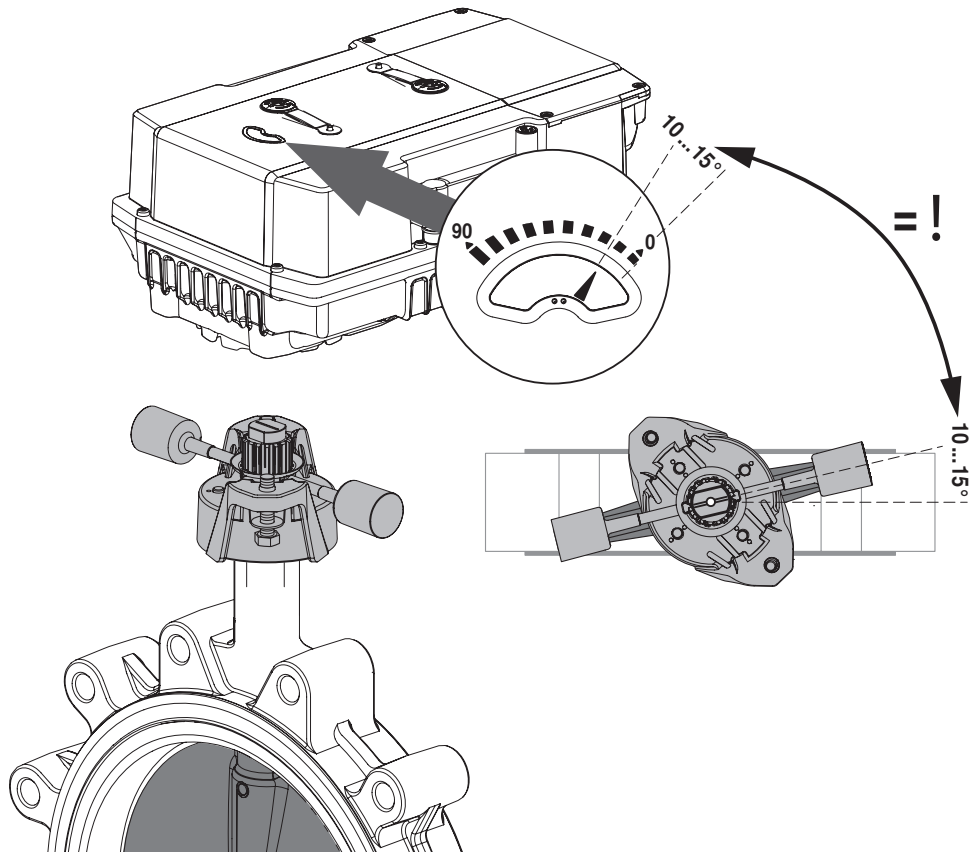

Video: IP66/67 with Belimo PR(K) actuator

www.belimo.eu/safety



3

1

2

3

4

2x




13

25 Nm


90

0



0

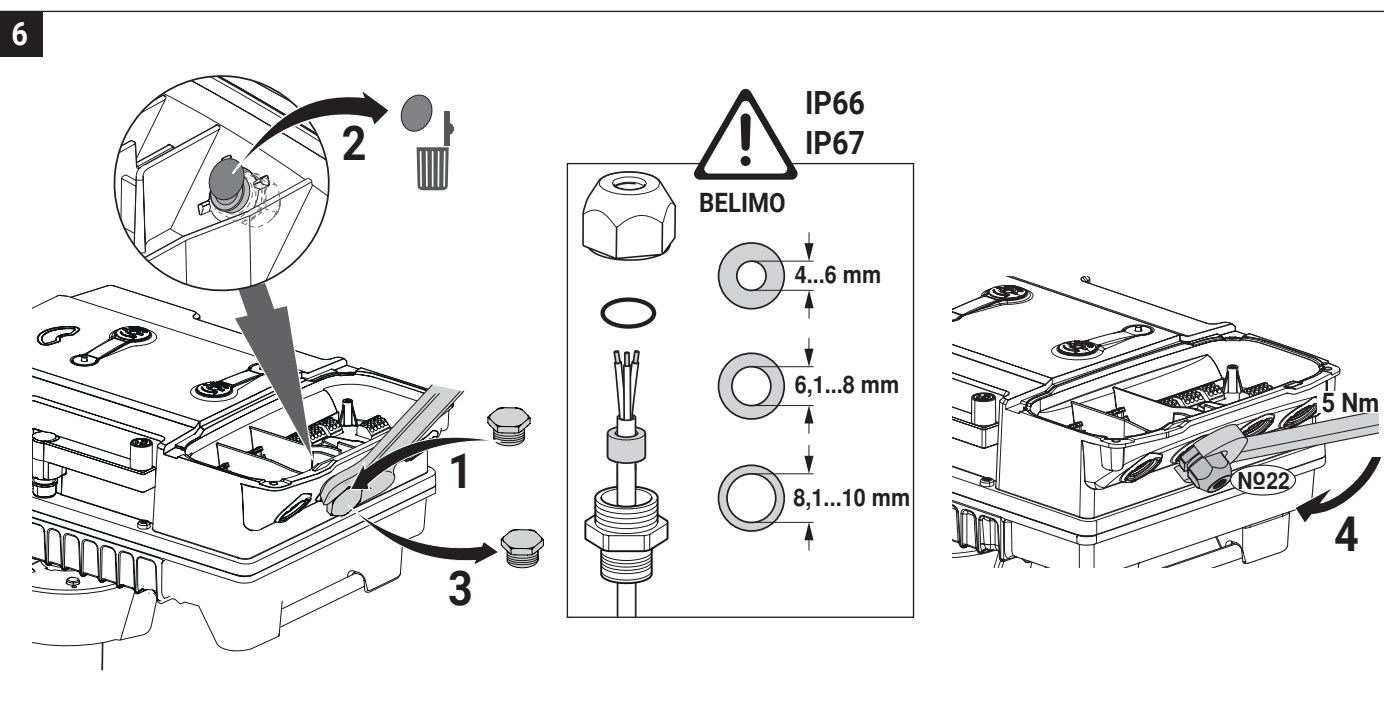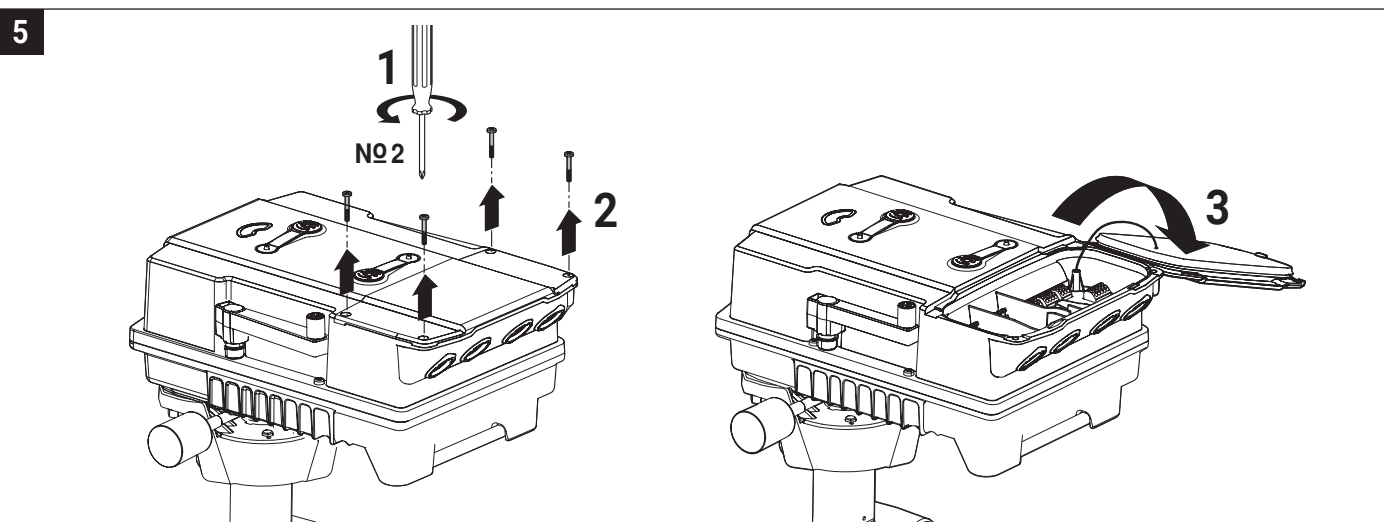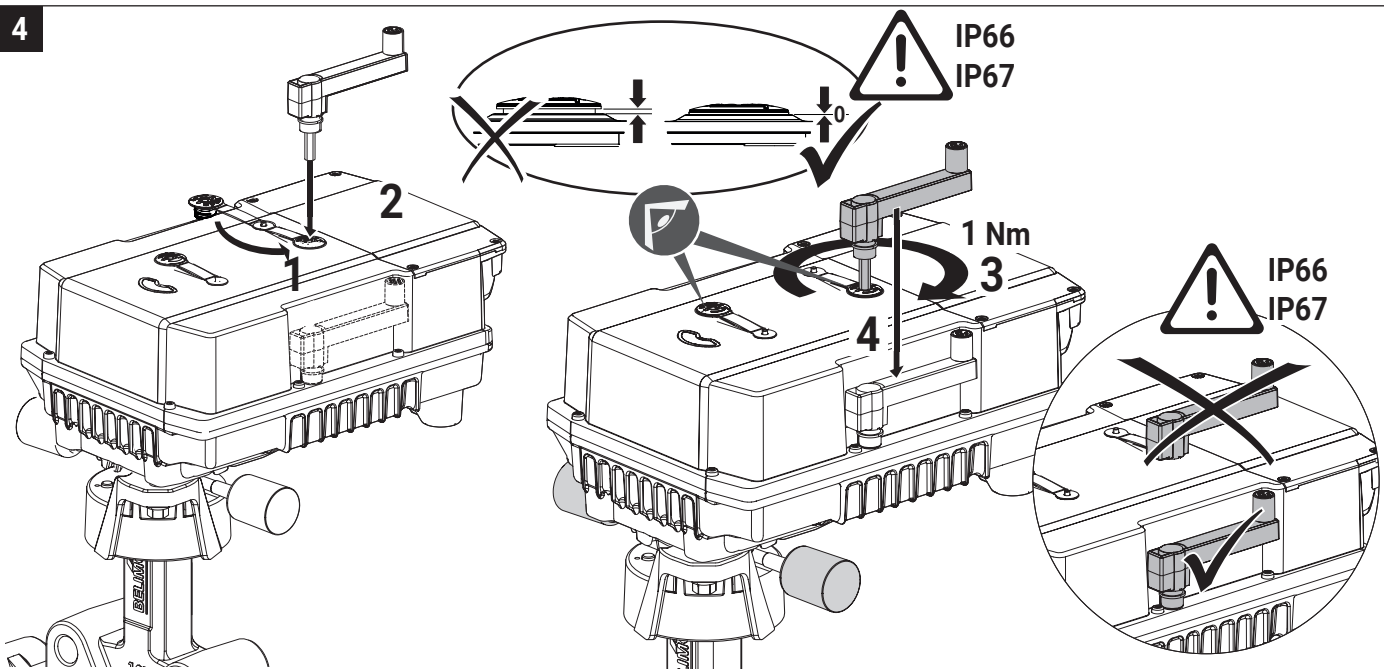


7

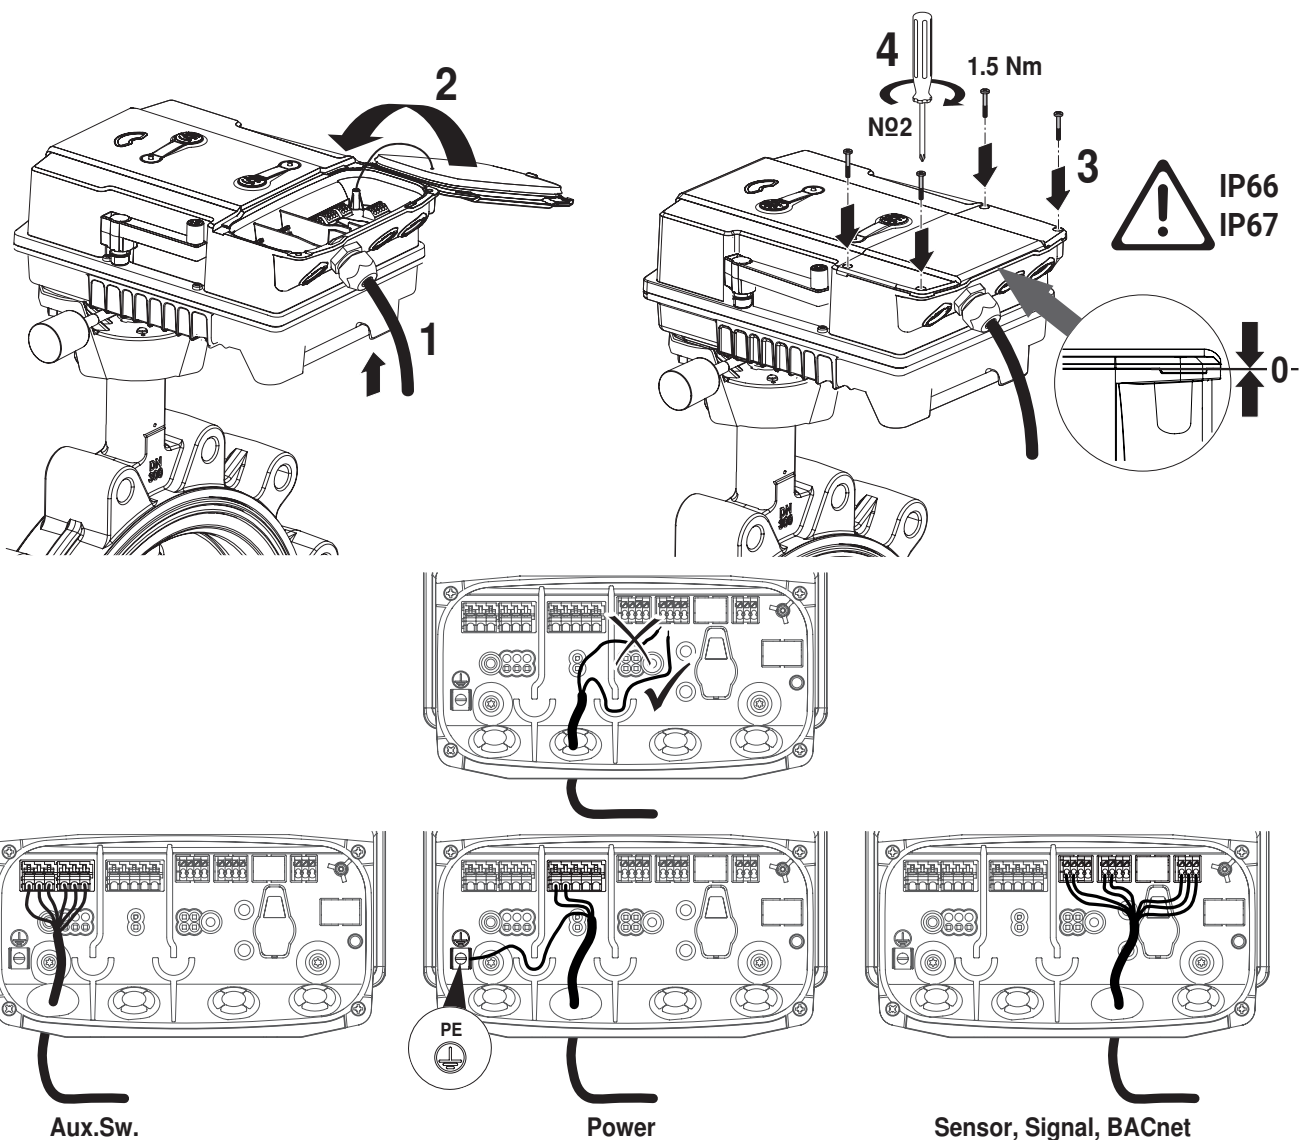


AC 24...240 V ⚠
DC 24...125 V



PRCA-S2-T
PR(K)CA-BAC-S2-T



AC 24...240 V ⚠
DC 24...125 V




PRCA-S2-T
PR(K)CA-BAC-S2-T


Connection auxiliary switch

230 V + 230 V ✓
24 V + 24 V

~~230 V + 24 V~~
~~24 V + 230 V~~




AC 24...240 V
DC 24...125 V

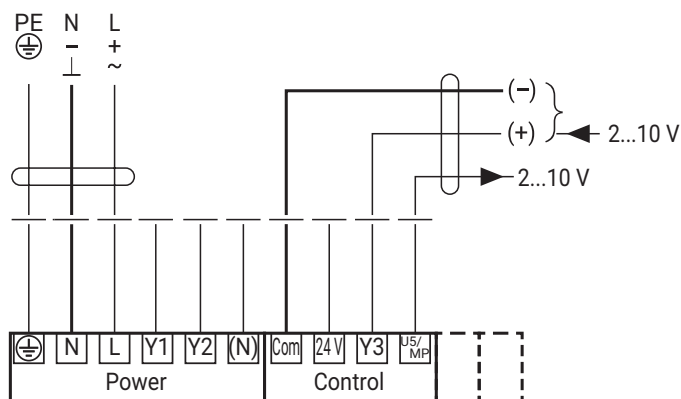


PR(K)CA-BAC-S2-T





MP-Bus

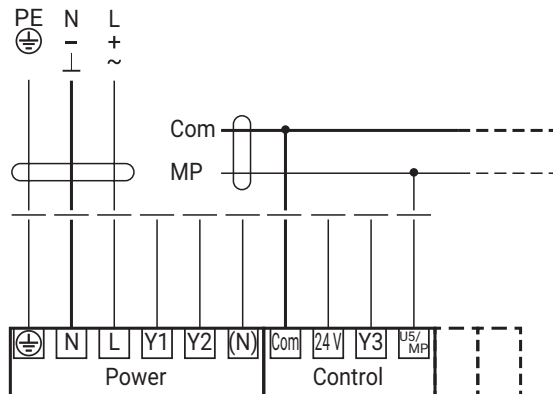


BACnet MS/TP / Modbus RTU

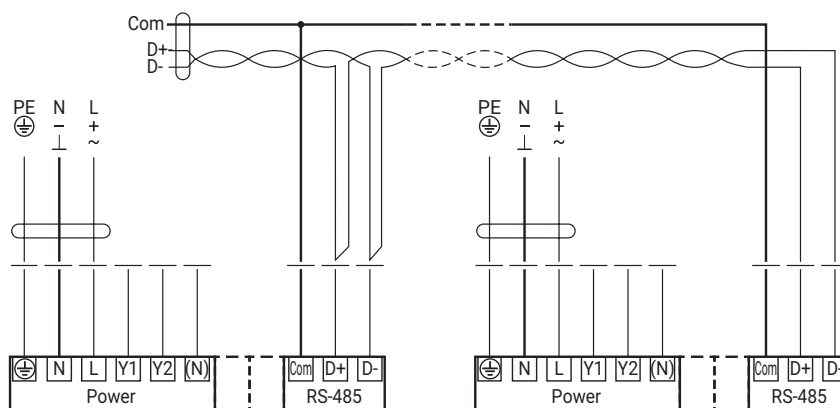


BACnet MS/TP / Modbus RTU / analog

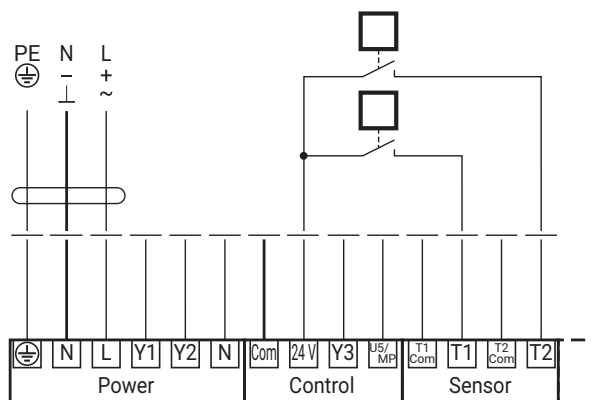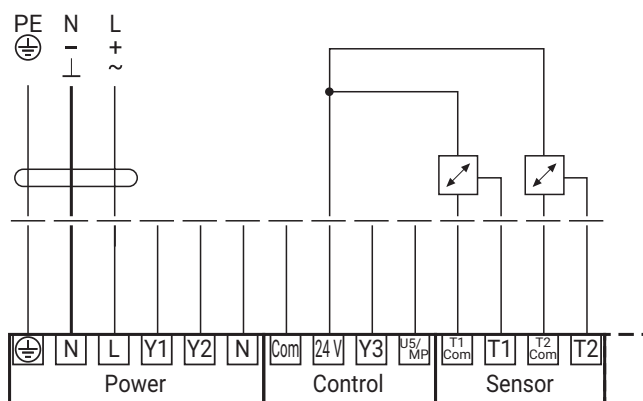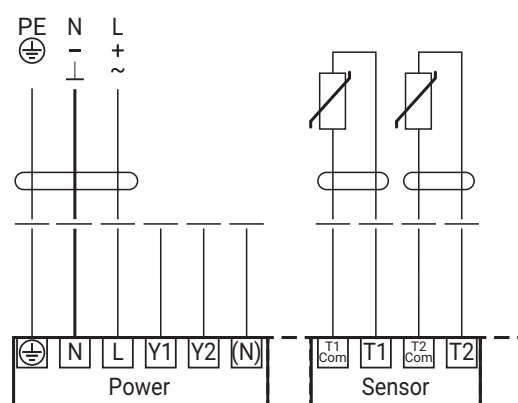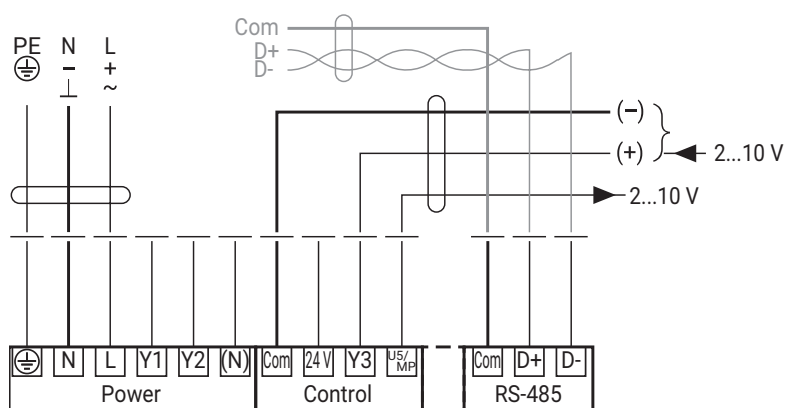

i

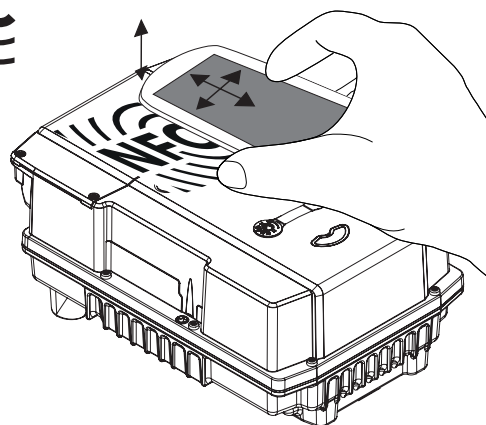Available on the
App StoreGET IT ON
Google Play




i


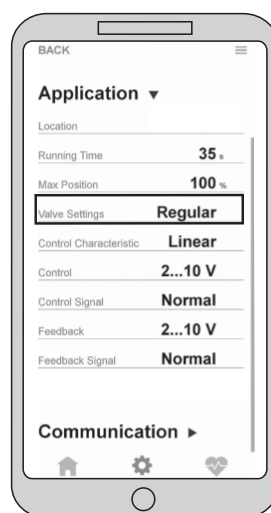


Regular	DN 80...150 D6300W(L) Retrofit
DN 200/8"	D6200W(L)
DN 250/10"	D6250W(L)


max. flow velocity
4 m/s

i

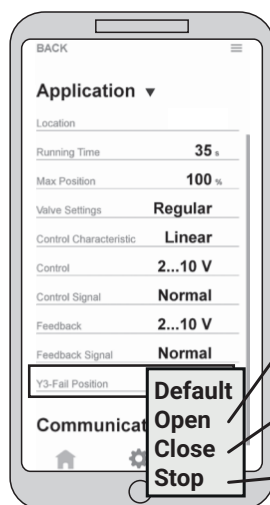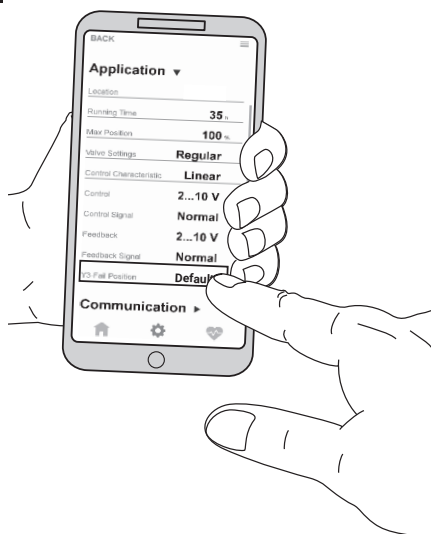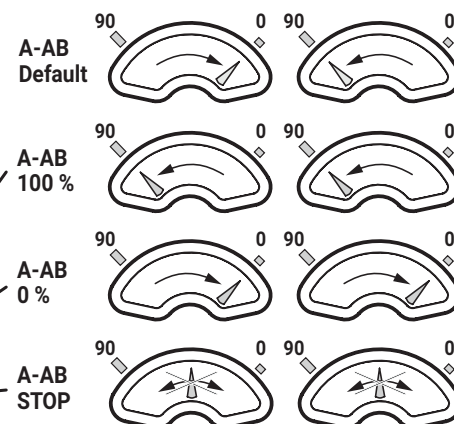
Y3-Fail
PositionControl Signal
NormalControl Signal
Inverted

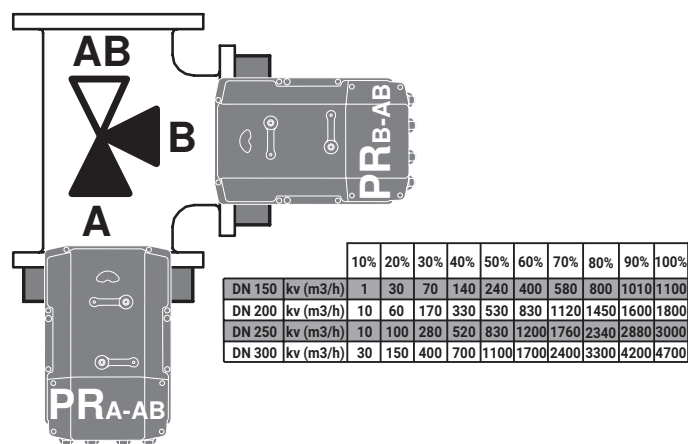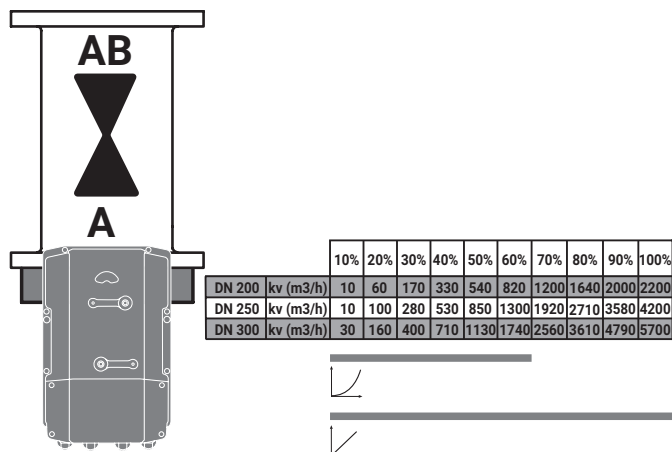


PR(K)CA-S2-T..

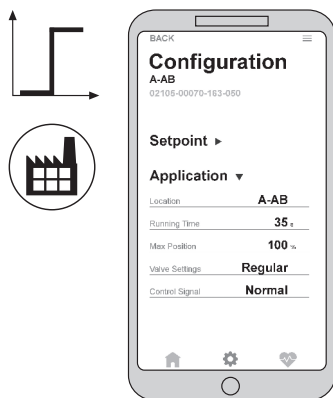

D7..L/BAC

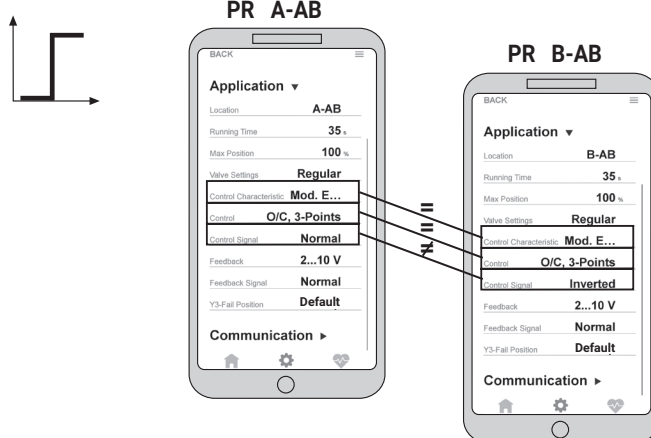

PR(K)CA-BAC-S2-T..

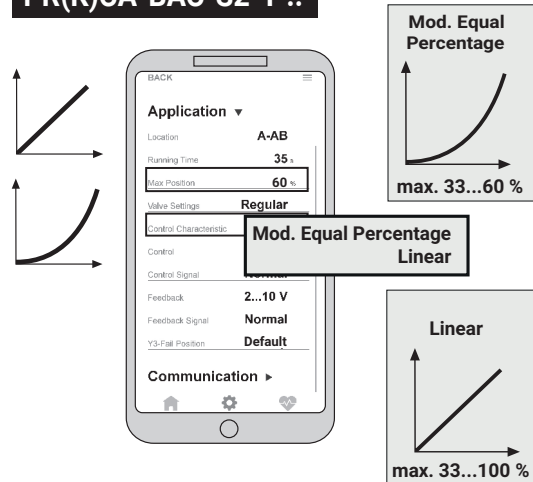

D7..L/BAC

