

Globe valve actuator with fail-safe for 2-way and 3-way globe valves

- Actuating force 1000 N
- Nominal voltage AC 24 V
- Control 3-point
- Stroke 20 mm

Technical





Nominal voltage Nominal voltage frequency Nominal voltage range Power consumption in operation Power consumption in rest position	AC 24 V 50/60 Hz AC 19.228.8 V 2.5 W
Nominal voltage frequency Nominal voltage range Power consumption in operation Power consumption in rest position	50/60 Hz AC 19.228.8 V
Nominal voltage frequency Nominal voltage range Power consumption in operation Power consumption in rest position	50/60 Hz AC 19.228.8 V
Nominal voltage range Power consumption in operation Power consumption in rest position	AC 19.228.8 V
Power consumption in operation Power consumption in rest position	
Power consumption in rest position	2.0 **
	1.5 W
	6 VA
<u></u>	Terminals 4 mm² (cable Ø410 mm)
	Yes (note the performance data)
-	
	1000 N
Setting fail-safe position	Spindle retracted / extended, adjustable (POP
	rotary knob)
	with push-button
	20 mm
	150 s / 20 mm
	35 s / 20 mm
Sound power level, motor	56 dB(A)
Sound power level, fail-safe	60 dB(A)
Position indication	Mechanically, 520 mm stroke
Protection class IEC/EN	III Safety Extra-Low Voltage (SELV)
Protection class UL	UL Class 2 Supply
Degree of protection IEC/EN	IP54
Degree of protection NEMA/UL	NEMA 2
Enclosure	UL Enclosure Type 2
EMC	CE according to 2014/30/EU
Certification IEC/EN	IEC/EN 60730-1 and IEC/EN 60730-2-14
Certification UL	cULus according to UL60730-1A, UL60730-2- 14 and CAN/CSA E60730-1:02
Certification UL note	The UL marking on the actuator depends on the production site, the device is UL-compliant in any case
Mode of operation	Type 1.AA
	0.8 kV
	3
Ambient temperature	050°C
Storage temperature	-4080°C
	Max. 95% r.H., non-condensing
	maintenance-free
Weight	1.2 kg
Abbreviations	POP = Power off position / fail-safe position CPO = Controlled power off / controlled fail-safe PF = Power fail delay time / bridging time
	Position indication Protection class IEC/EN Protection class UL Degree of protection IEC/EN Degree of protection NEMA/UL Enclosure EMC Certification IEC/EN Certification UL Certification UL note Mode of operation Rated impulse voltage supply / control Control pollution degree Ambient temperature Storage temperature Ambient humidity Servicing Weight



Safety notes



- This device has been designed for use in stationary heating, ventilation and airconditioning systems and must not be used outside the specified field of application, especially in aircraft or in any other airborne means of transport.
- Outdoor application: only possible in case that no (sea) water, snow, ice, insolation
 or aggressive gases interfere directly with the actuator and that is ensured that the
 ambient conditions remain at any time within the thresholds according to the data
 sheet.
- Only authorised specialists may carry out installation. All applicable legal or institutional installation regulations must be complied during installation.
- The switch for changing the direction of motion and so the closing point may be adjusted only by authorised specialists. The direction of motion is critical, particularly in connection with frost protection circuits.
- The device may only be opened at the manufacturer's site. It does not contain any parts that can be replaced or repaired by the user.
- The device contains electrical and electronic components and must not be disposed
 of as household refuse. All locally valid regulations and requirements must be
 observed.

Product features


Mode of operation

The actuator moves the valve to the desired operating position at the same time as the integrated capacitors are loaded. Interrupting the supply voltage causes the valve to be moved to the selected fail-safe position by means of stored electrical energy.

Pre-charging time (start up)

The capacitor actuators require a pre-charging time. This time is used for charging the capacitors up to a usable voltage level. This ensures that, in the event of a power failure, the actuator can move at any time from its current position into the preset failsafe position. The duration of the pre-charging time depends mainly on how long the power was interrupted.

Typical pre-charging time

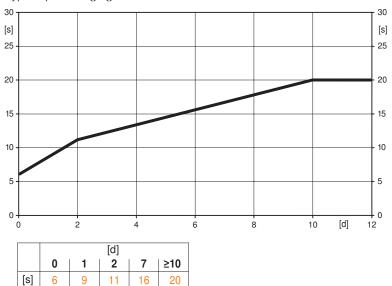

[d] = Electricity interruption in days [s] = Pre-charging time in seconds

Delivery condition (capacitors)

The actuator is completely discharged after delivery from the factory, which is why the actuator requires approximately 20 s pre-charging time before initial commissioning in order to bring the capacitors up to the required voltage level.

Installation on third-party valves

The retrofit actuators for installation on a wide range of valves from various manufacturers are comprised of an actuator, bracket, universal valve neck adapter and universal valve stem adapter. Adapt the valve neck and valve stem to begin with, then attach the retrofit bracket to the valve neck adapter. Now fit the retrofit actuator into the bracket and connect it to the valve. Whilst taking the position of the valve closing point into account, secure the actuator to the bracket and then conduct the commissioning process. The valve neck adapter/actuator can be rotated through 360° on the valve neck, provided it is permitted by the size of the installed valve.

Globe valve actuator fail-safe (Retrofit), 3-point, AC 24 V, 1000 N



Product features

installation of retrofit actuators on Belimo globe valves is technically possible.

Manual override Manual control with push-button possible - temporary. The gear is disengaged and the

actuator decoupled for as long as the button is pressed.

The stroke can be adjusted by using a hexagon socket screw key (4 mm), which is inserted into the top of the actuator. The stroke shaft extends when the key is rotated

clockwise.

High functional reliability The actuator is overload protected, requires no limit switches and automatically stops

when the end stop is reached.

Position indication The stroke is indicated mechanically on the bracket with tabs. The stroke range

adjusts itself automatically during operation.

Home position Factory setting: Actuator spindle is retracted.

Setting direction of stroke When actuated, the stroke direction switch changes the running direction in normal

operation. The stroke direction switch has no influence on the fail-safe position which

has been set.

Setting fail-safe position (POP) The rotary knob fail-safe position can be used to adjust the desired fail-safe position.

The setting range always refers to the maximum height of stroke of the actuator. In the event of a power failure, the actuator will move into the selected fail-safe position, taking into account the bridging time (PF) of 2 s which was set ex-works.

Accessories

	Description	Туре
Electrical accessories	Auxiliary switch 2 x SPDT add-on	S2A-H

Electrical installation




Notes

- · Connection via safety isolating transformer.
- Parallel connection of other actuators possible. Observe the performance data.
- Direction of stroke switch factory setting: Actuator spindle retracted (▲).

Wiring diagrams


AC 24 V, 3-point



а	b		
1	/_	+	†
/_	/_		
/	<u> </u>	†	+
<u> </u>	1	+	†



Operating controls and indicators

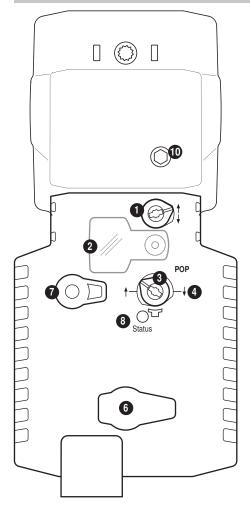

Direction of stroke switch

Switch over: Direction of stroke changes

2 Cover, POP button

POP button

4 Scale for manual adjustment

6 (no function)

7 Disengagement button

Press button: Gear disengages, motor stops, manual override possible


Release button: Gear engages, synchronisation starts, followed by standard mode

LED display 8 green	Meaning / function
On	Operation OK / without fault
Flashing	POP function active
Off	Not in operation Pre-charging time SuperCap Fault SuperCap

Manual override

Clockwise: Actuator spindle extends
Counterclockwise: Actuator spindle retracts


Setting emergency setting position (POP)

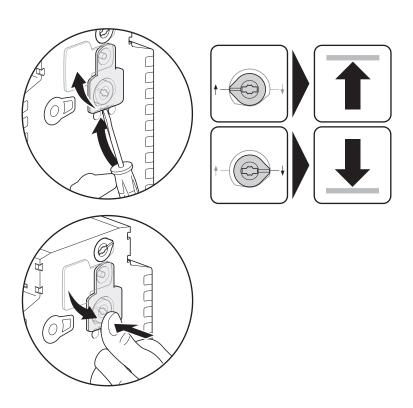



Dimensions [mm]

Dimensional drawings

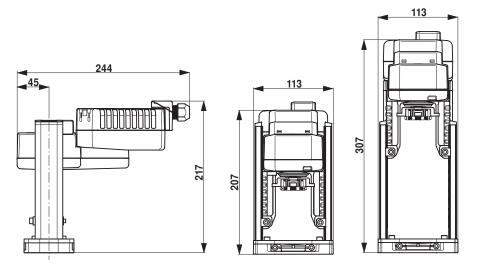

Further documentation

· Installation instructions for actuators