






R2..-S..

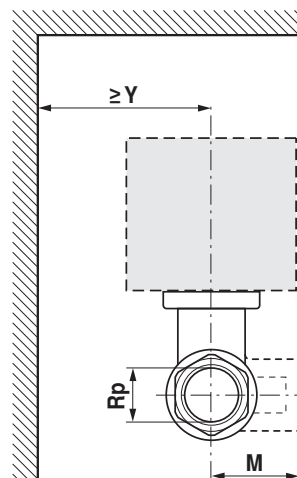




R3..-S..

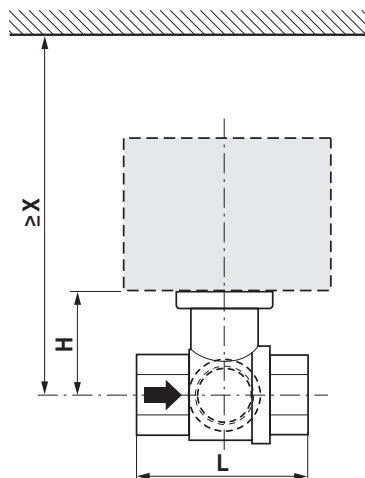

71270-00001.D



t -10...120 °C																											
p _s 1600 kPa																											
		DN	Rp	mm				80 °C		100 °C		120 °C						100 °C		120 °C							
								KR..		TR..		LR..A		NR..A		SR..A		TRF..		LRF..		NRF..A		SRF..A			
		mm	”	L	H	M	L1	X	Y	X	Y	X	Y	X	Y	X	Y	X	Y	X	Y	X	Y	X	Y	X	Y
R2015-P..-S1 R2015-1..-S1	R3015-P..-S1 R3015-1..-S1	15	½”	67	35	36	13	141	75	176	75	186	75	221	80	221	80	181	80	191	90	211	90	211	90		
R2015-2P5-S1 R2015-4-S1 R2015-6P3-S1	R3015-2P5-S1 R2015-4-S1	15	½”	67	44	36	13	150	75	185	75	195	75	230	80	230	80	190	80	200	90	220	90	220	90		
R2020..-S2	R3020..-S2	20	¾”	78	46	41.5	14					200	75	235	80	235	80			205	90	225	90	225	90		
R2025..-S2	R3025..-S2	25	1”	87	46	45	16					200	75	235	80	235	80			205	90	225	90	225	90		
R2032..-S3	R3032..-S3	32	1¼”	105	50.5	55.5	19							240	80	240	80					230	90	230	90		
R2040..-S3	R3040..-S3	40	1½”	111	50.5	56	19							240	80	240	80					230	90	230	90		
	R3040-25-S4	40	1½”	122	62	66.5	19									250	80							240	90		
R2050..-S4	R3050..-S4	50	2”	125	56	68	22									245	80							235	90		
	R3050-40-S4 R3050-58-S4	50	2”	142	68	79	22									262	80							252	90		

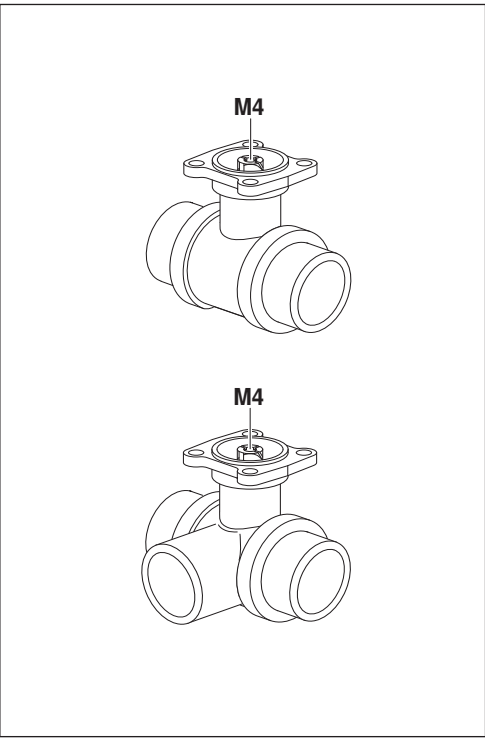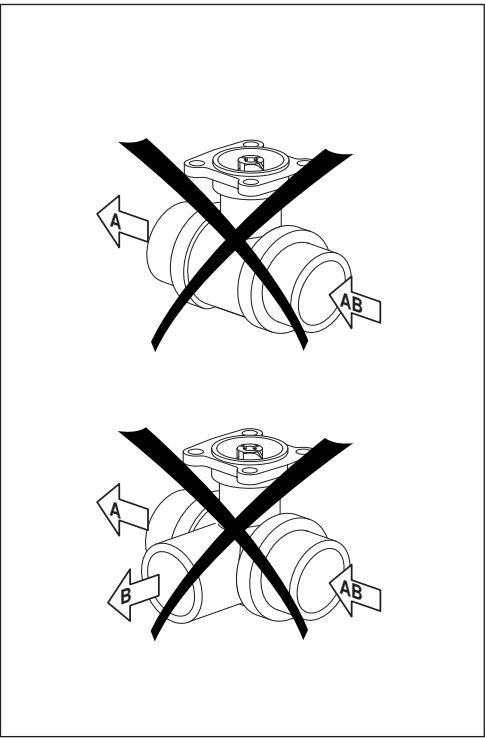

	A → AB 100%	A → AB 0%
	B → AB 0%	B → AB 100%

